



# IECEX Certificate of Conformity

## INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification Scheme for Explosive Atmospheres

for rules and details of the IECEx Scheme visit [www.iecex.com](http://www.iecex.com)

Certificate No.: IECEx SIR 07.0064U issue No.:1

Status: **Current**

Certificate history:  
Issue No. 1 (2010-3-4)  
Issue No. 0 (2008-2-15)

Date of Issue: 2010-03-04 Page 1 of 5

Applicant: **Energys S.A.R.L.**  
ZI Est  
Rue Alexander Fleming  
62033 Arras  
France

Electrical Apparatus: **Evolution Range of Type D Lead Acid Motive Power Cells**  
Optional accessory:

Type of Protection: **Increased safety and Dust**

Marking: **Ex e I  
Ex e II  
Ex tD A21 T80°C IP65.**

Approved for issue on behalf of the IECEx Certification Body: D R Stubbings BA MIET

Position: Certification Manager

Signature:  
(for printed version)

Date:

2010-03-04

1. This certificate and schedule may only be reproduced in full.
2. This certificate is not transferable and remains the property of the issuing body.
3. The Status and authenticity of this certificate may be verified by visiting the [Official IECEx Website](http://www.iecex.com).

Certificate issued by:

**SIRA Certification Service**  
Rake Lane  
Ecclestone  
Chester  
CH4 9JN  
United Kingdom

**sira**  
CERTIFICATION



# IECEX Certificate of Conformity

Certificate No.: IECEX SIR 07.0064U

Date of Issue: 2010-03-04

Issue No.: 1

Page 2 of 5

Manufacturer: **Energys S.A.R.L.**  
ZI Est  
Rue Alexander Fleming  
62033 Arras  
**France**

Manufacturing location(s):

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEX Quality system requirements. This certificate is granted subject to the conditions as set out in IECEX Scheme Rules, IECEX 02 and Operational Documents as amended.

#### STANDARDS:

The electrical apparatus and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards:

<b>IEC 60079-0 : 2004</b> Edition: 4.0	Electrical apparatus for explosive gas atmospheres - Part 0: General requirements
<b>IEC 60079-7 : 2006-07</b> Edition: 4	Explosive atmospheres - Part 7: Equipment protection by increased safety "e"
<b>IEC 61241-0 : 2004</b> Edition: 1	Electrical apparatus for use in the presence of combustible dust - Part 0: General requirements
<b>IEC 61241-1 : 2004</b> Edition: 1	Electrical apparatus for use in the presence of combustible dust - Part 1: Protection by enclosures "tD"

*This Certificate does not indicate compliance with electrical safety and performance requirements other than those expressly included in the Standards listed above.*

#### TEST & ASSESSMENT REPORTS:

*A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in*

Test Report:

[GB/SIR/ExTR07.0112/00](#)  
[GB/SIR/ExTR10.0026/00](#)

Quality Assessment Report:  
[GB/SIR/QAR08.0003/00](#)



# IECEx Certificate of Conformity

Certificate No.: IECEx SIR 07.0064U

Date of Issue: 2010-03-04

Issue No.: 1

Page 3 of 5

## Schedule

### EQUIPMENT:

*Equipment and systems covered by this certificate are as follows:*

#### Evolution Range of Type D Lead Acid Motive Power Cells

The Evolution Type D range of lead acid traction cells are designated by the manufacturer as IEC 254-2 Series L cells. Each cell is 198 mm wide and has 2 to 8 positive plates terminated on two terminal posts. Connection to the terminal posts may be by the use one of the following methods.


- 1 Sealed post terminals, welded, with insulating covers.
- 2 Induction welded terminals with encapsulated caps.
- 3 Female threaded inserts with insulated bolt heads.
- 4 Female threaded inserts incorporating insulated caps.
- 5 Male threaded inserts with insulated anti-vibration locknuts.

A pressure vent cap is fitted to the top of the cell casing and this vents at a pressure of <0.15bar. The cell is filled with gelled electrolyte and is maintenance free.

Typical cell type designation: S6PzV125

S = Single posted cells, 6 = Number of positive plates, PzV125 = Type (V = Evolution)

### CONDITIONS OF CERTIFICATION: NO

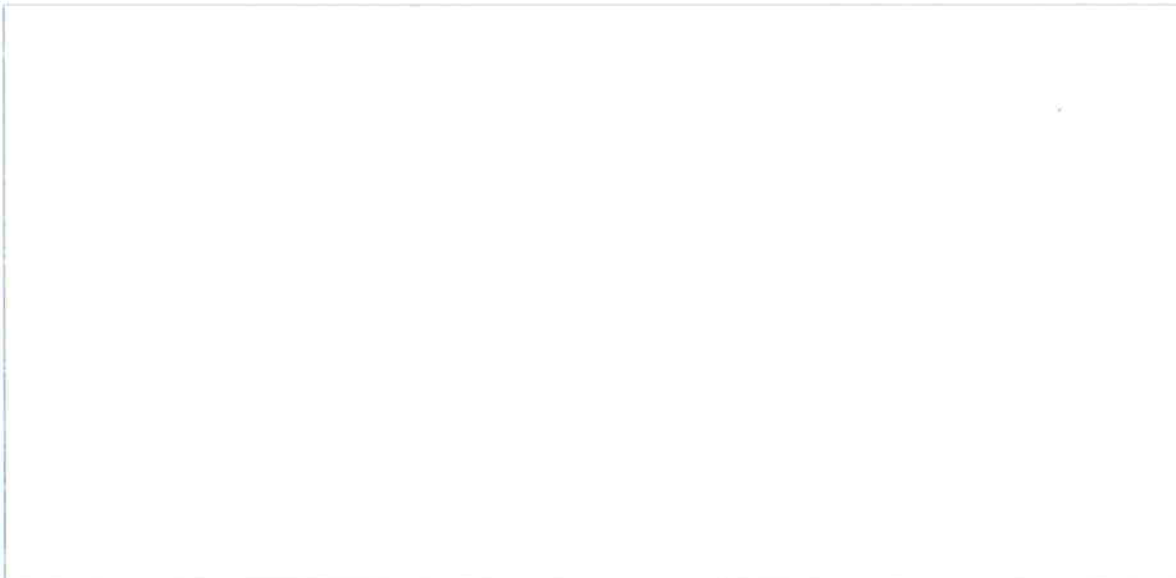



# IECEx Certificate of Conformity

Certificate No.: IECEx SIR 07.0064U

Date of Issue: 2010-03-04

Issue No.: 1

Page 4 of 5

## EQUIPMENT(continued):

### Conditions of manufacture

1. The manufacturer shall include the full cell marking details in the instruction leaflet.

The user shall be advised of the following special points for installation:

1. These components comply with IEC 60079-7:2006 clauses 5.7.2.3 (acceptable electrochemical systems), 5.7.2.2 (classification), 5.7.1.3 (cells), 5.7.1.4 (connections) and 6.6.3 (shock test). When they are assembled into a battery, the remaining clauses of IEC 60079-7:2006 need to be addressed with particular reference to clauses 5.7.2.1 (general requirements), 5.7.2.4 (charging in hazardous areas), 5.7.2.5 (discharge of cells), 5.7.2.6 (incorporation of other protection concepts), 5.7.2.7 (disconnection and transportation), 5.7.1.2 (battery containers), 6.6 (secondary batteries) and 6.6.4 (ventilation).



# IECEx Certificate of Conformity

Certificate No.: IECEx SIR 07.0064U

Date of Issue: 2010-03-04

Issue No.: 1

Page 5 of 5

## DETAILS OF CERTIFICATE CHANGES (for issues 1 and above):

Issue 1 – this Issue introduced the following changes:	
1	To allow the introduction of an alternative polypropylene copolymer housing material.
2	The recognition of minor drawing modifications; these amendments are administrative or involve changes to the design that do not affect the aspects of the product that are relevant to explosion safety.
3	To recognise a rise in the maximum discharge current from 270 A to 310 A.
4	Drawings SIRAATEX1, SIRAATEX4 P25127 and P25128 are amended to remove reference to the minimum contact area.
5	Drawings SIRAATEX1, SIRAATEX4 P25127, P25128, P24807 and P24808 have been modified to include a wider range of cable cross sections